R454b
Refrigerant

SUBMITTAL DATA SHEET

Series Name: EVOX Multi-Position Air Handler Cooling Only Series
Model Number: MAUHE-H18B-2A/MO1AE-C18B-2A

Midea

Air Handler Cooling Only System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION		
ESP (in.W.C.)		0-0.8
Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		618 / 577 / 530 / 489 / 489
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		44 / 43 / 41 / 33 / 33
Dimension (W×D×H)	inch	17-1/2 x 21 x 45
	mm	445 × 534 × 1,143
Package (W×D×H)	inch	26-5/8 x 20-7/8 x 48-5/8
	mm	675 × 530 × 1,235
Net/Gross Weight	lbs	106 / 127
	kg	48 / 57.5

OUTDOOR SPECIFICATION		
Compressor Type		ROTARY
Compressor Model		KSN140D58UFZ
Refrigerant		R454B
Refrigerant Oil Charge(mL)		440
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		1,413
Outdoor Noise Level (dBA)		54
Dimension (W×D×H)	inch	31-3/4 x 13 x 21-3/4
	mm	805 × 330 × 554
Package (W×D×H)	inch	36 x 14-9/16 x 24-3/16
	mm	915 × 370 × 615
Net/Gross Weight	lbs	67 / 73
	kg	30.3 / 33.3

EFFICIENCY			
Cooling		Heating	
SEER2	18.4	HSPF2-4	/
EER2	11.7	COP	/

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	18,000
Min/Max Capacity	7,200 ~ 20,000
Moisture Removal(L/h)	1.7
Standard Operating Range(°F/°C)	-13 ~ 122(-25 ~ 50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB


PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	/
2. @ 47°F Min/Max Capacity	/
3. @ 17°F Rated	/
4. @ 5°F Rated: Capacity / COP	///
5. @ 5°F Max: Capacity	/
Standard Operating Range(°F/°C)	/(/)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL	
Indoor Power Supply	115/208/230V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	5.5/4.0
Indoor MOP	15
Outdoor Power Supply	208/230V,60Hz,1Ph
Outdoor MCA	16
Outdoor MOP	20
Communication Wiring	AWG 20-2
Compressor RLA	12
Outdoor Fan Motor RLA	0.5
Outdoor Fan Motor W	34
Indoor Fan Motor RLA	2
Indoor Fan Motor W	250
System Power Input @ Cooling (W)	1,540(400 ~ 1,850)
System Power Input @ Heating (W)	/(/)
MCA: Min. circuit amps (A)	**MOCP: Max. over current protection (A)**
RLA: Rated load amps (A)	**W: Fan motor rated output (W)**

PIPING	
Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	3/8" (9.52)
Gas Size	3/4" (19)
Max. Piping Length(ft/m)	98(30)
Max. Height Difference(ft/m)	66(20)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	42.3(1.2)
Additional Charge of Refrigerant((oz/ft)/(g/m)	0.7(65)
Connection Method	Flared*


*The gas valve of the outdoor unit is 5/8", 5/8" to 3/4" flare to flare connector is required for the installation.

Indoor Unit Dimension

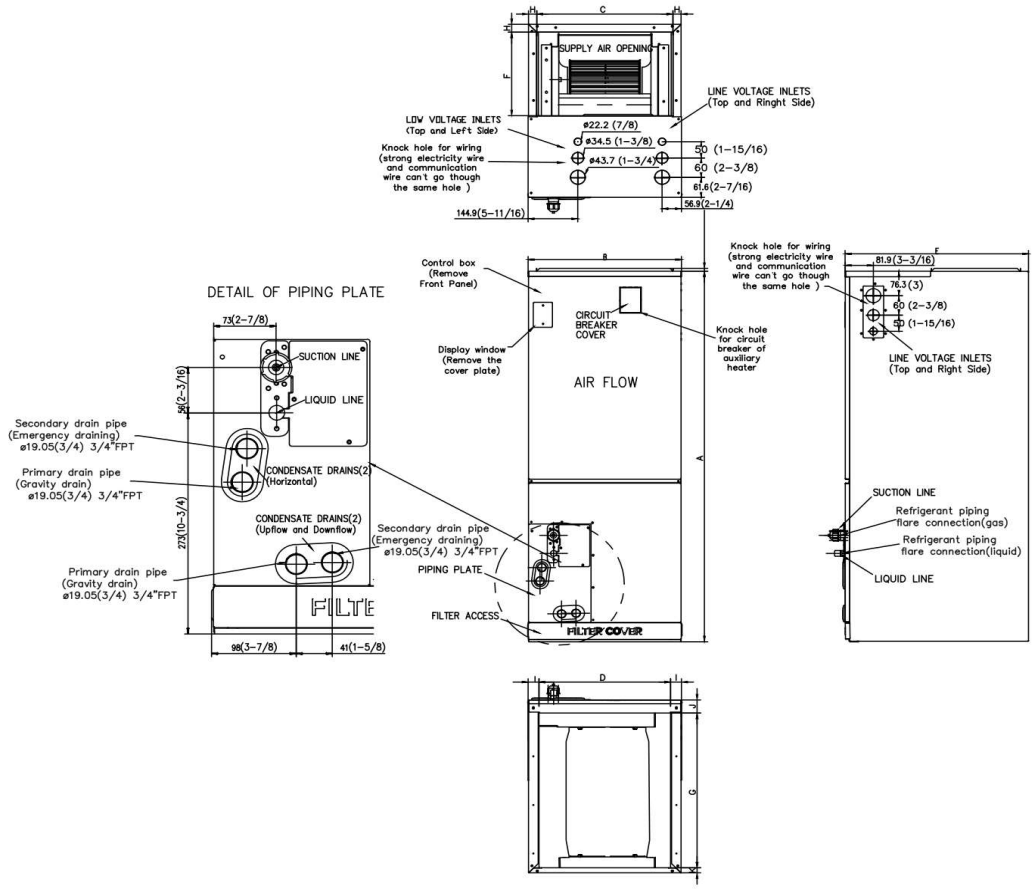


Dimensions \ Model		18k/24k		30k/36k		48k/60k	
		inch	mm	inch	mm	inch	mm
A	Model Height	45	1143	49	1245	53	1346
B	Model Width	17-1/2	445	21	534	24-1/2	622
C	Supply Air Opening Width	15-5/8	397	19-1/8	486	22-5/8	575
D	Return Air Opening Width	15-1/8	384	18-5/8	473	22-1/8	562
E	Model Depth	21	534	21	534	21	534
F	Supply Air Opening Depth	10-1/4	260	10-1/4	260	10-1/4	260
G	Return Air Opening Depth	18-3/4	476	18-3/4	476	18-3/4	476
H	Supply Air Opening Clearance	15/16	24	15/16	24	15/16	24
I	Return Air Opening Side Clearance	1-1/4	32	1-1/4	32	1-1/8	28
J	Return Air Opening Front Clearance	1-1/2	38	1-5/8	41	1-5/8	41
K	Return Air Opening Back Clearance	5/8	16	5/8	16	3/4	19

Outdoor Unit Dimension

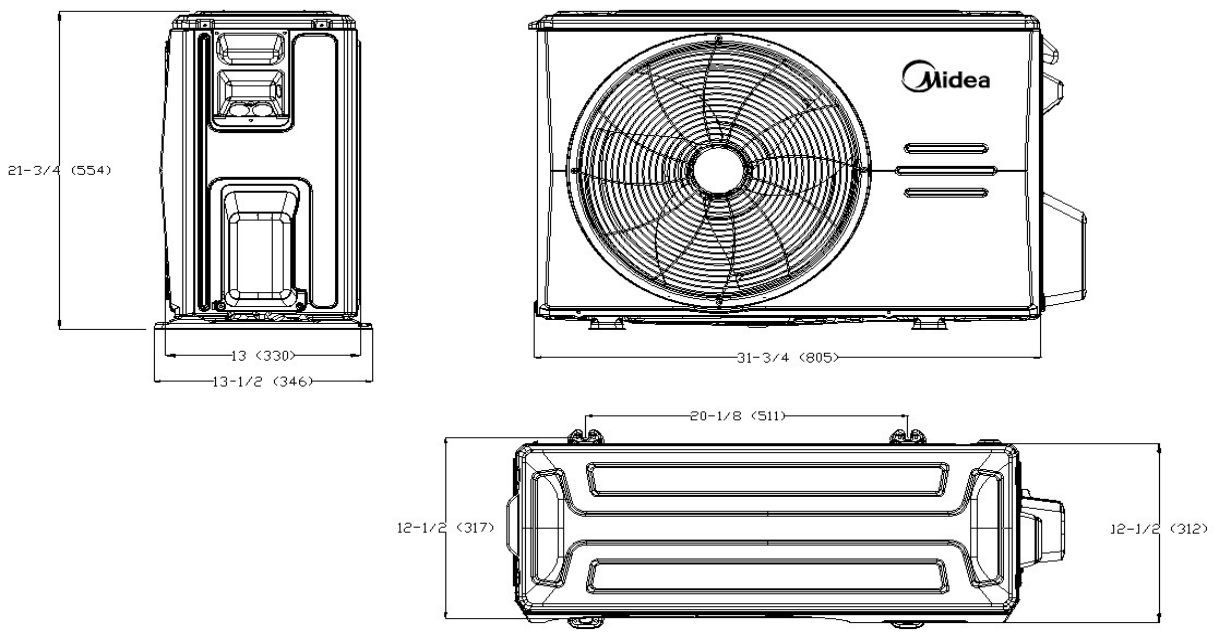


Installation Instruction For Outdoor Unit

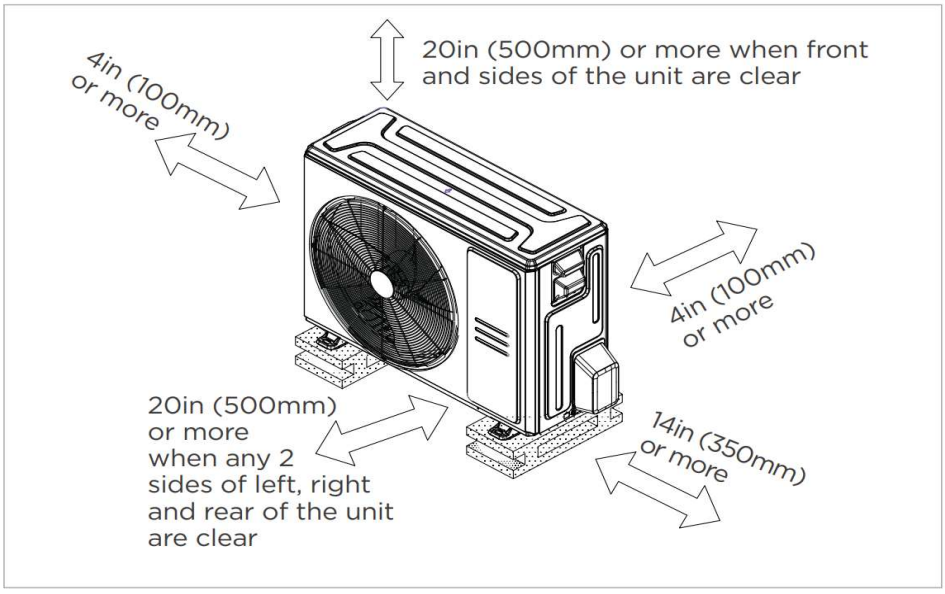

☑ Meets all spatial requirements shown in Installation Clearance Requirements above.

Fan Performance For Indoor Unit

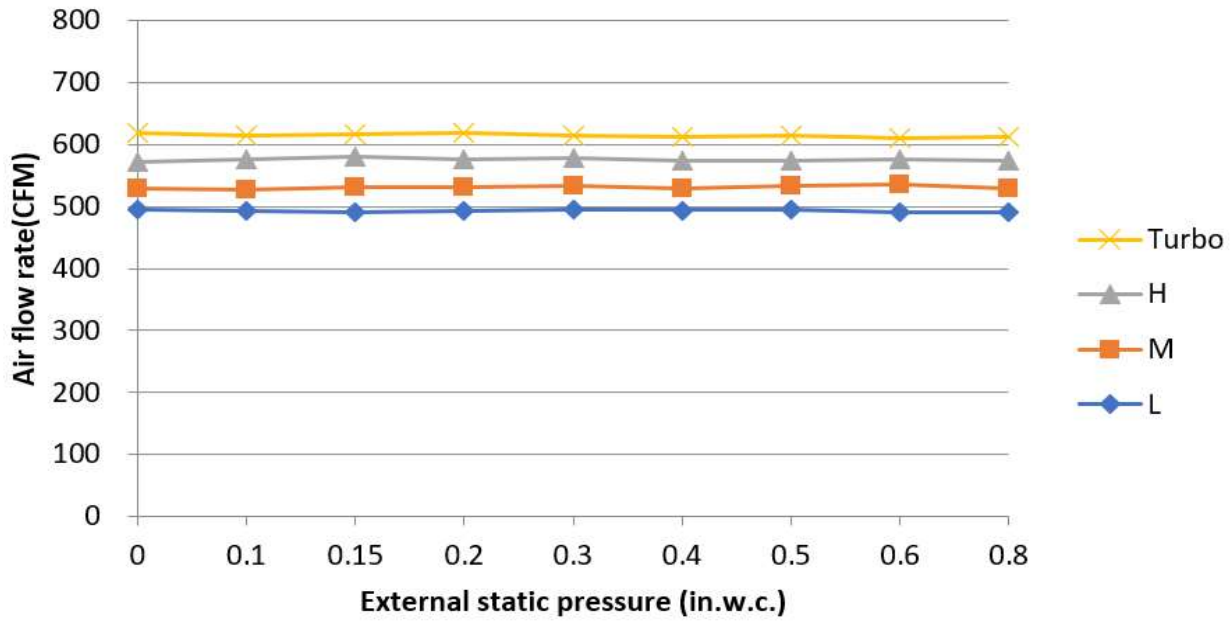

Features

- Multi-position installation: horizontal(left or right), vertical(up or down)
- The IDU supports 115/230V voltage compatibility
- Aluminum Coil
- Constant Air Flow system: Up to 0.8 In.W.C.
- Optional Auxiliary heat kit up to 25kW
- Easy Maintenance
- Multiple control options available:
  - Wireless remote controller RG10 (Built-In)
  - Two-way communication programmable wired controller with built-in Wi-Fi:120N(X6W)
  - Midea Smart Thermostat
  - Third-Party 24V Thermostat
- Adaptive Control System
- Standard graphene fins, a standard feature of the outdoor unit, deliver superior corrosion resistance
- The outdoor unit comes standard with crankshaft electric heating
- Built-in Refrigerant Detection Sensor